


Mesh Flex Premium PAP FR

CHARACTERISTICS		
Material	1000Dx1000 Denier (High tenacity yarn) 100%PES	DIN EN ISO2060
Construction	9x13 inch	DIN60001
Weight of fabric	100 g/m ²	DIN53352 BS3424 Method5B
PVC weight	170g/m ²	DIN53352 BS3424 Method5B
Total weight	270g/m ²	DIN53352 BS3424 Method5A
Tensile strength	Warp: 850 N/5cm Weft: 1100 N/5cm	DIN53356 BS3424 método7A
Tearing strength	Warp: 200 N Weft: 215 N	DIN53356 BS3424method7A
Suitable temperature	-20~70 °C	DIN53357 BS3425 Method10
Lacquering	No	-
Flame retardancy	Yes	FR Certificate

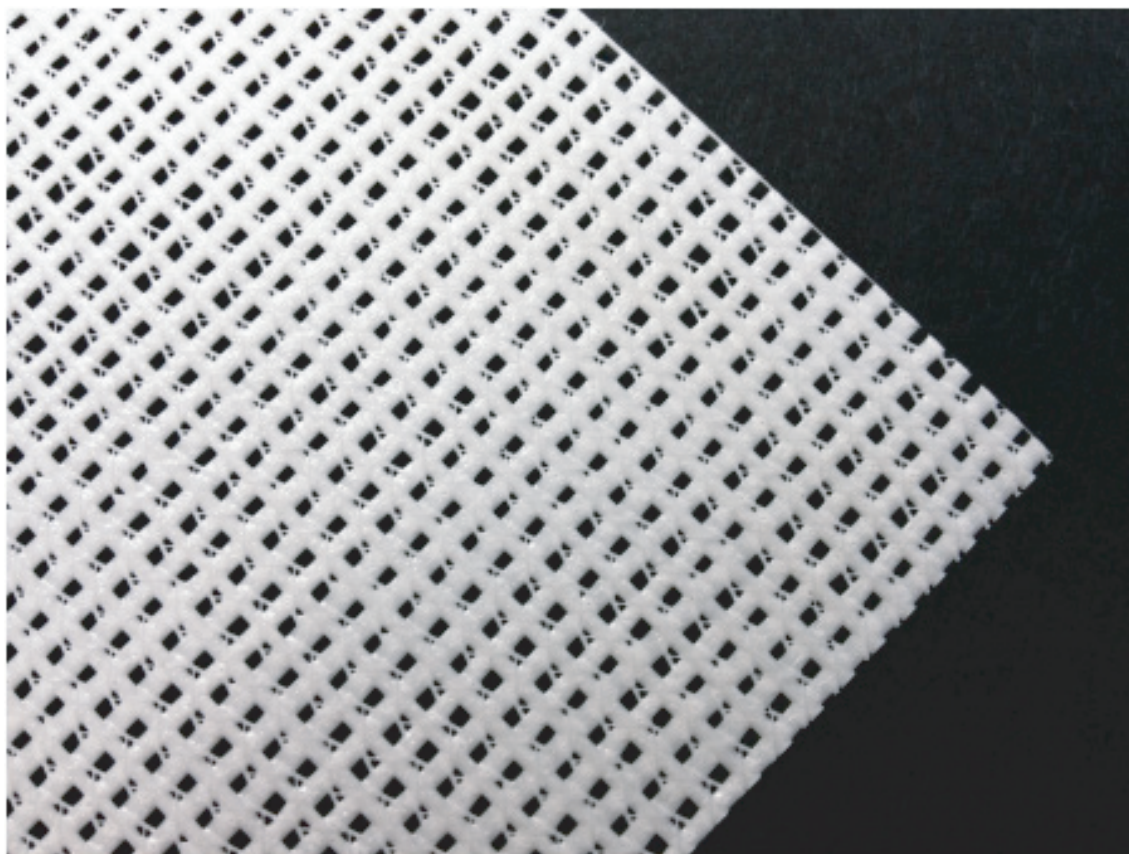

SEDIU BUCUREȘTI:

Calea Vitan 238, sector 3
031301 București
bucuresti@verla.ro
Tel: +4 0729 016 484

SEDIU CLUJ-NAPOCA

Corneliu Coposu 41
400235, Cluj-Napoca
cluj@verla.ro
Tel: +4 0721 242 216

SEDIU IAȘI

Aurel Vlaicu 87
700382, Iași
iasi@verla.ro
Tel: +4 0746 124 531