

PrintTex®

DESCOR® PREMIUM Acoustic

Fields of application

.01 .02 .03 .05 .07 .12

Specifications

REF.	699144 085
	100 % polyester with micro-perforation air permeable
	ca. 320/ 420/ 520cm cm ca. 122/ 165/ 205 inch other widths available on request
	B-s1, d0 DIN EN 13501-1 M3 NF P 92
	ca. 190 g/m ² ca. 5.6 oz/yd ²
	rolls 50 m 55 yd
	blank: 7 DIN EN ISO 105-B02
	ca. 0,39 mm ca. 390 µm
	cold, heat, ultrasonic cut

Printing methods


print	UV	Latex	Dyesub
Inside	•		
Outside			

Certifications



Acoustic absorption value α_w /class*: 0.90/ A

Type of assembly E-50 according to DIN EN ISO 354.
Textile in front of total 50 mm, included
40 mm ISOVER SSP 2 and 10 mm airspace.

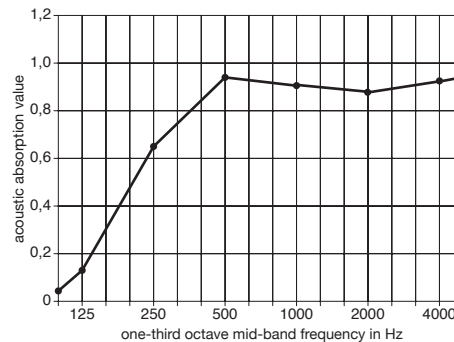


Please note, there may be slight variations in technical details for other DESCOR® colours.

PrintTex®
DESCOR® PREMIUM Acoustic

Fields of application

.01 .02 .03 .05 .07 .12

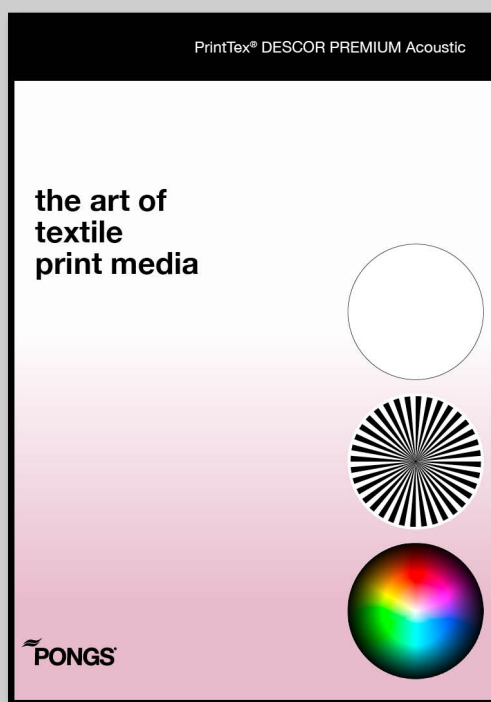

Ref.-Nr.: 699144 085 | Preview print sample