



## Features



- Sourced by high output SMD2835, good color conformity and no spot.
- 99.99% gold thread, pure copper bracket coated with silver.
- Constant current driving technology guarantees stable performance of product.
- SDCM≤5 each BIN.
- Special lens design, 170°beaming angle with even light.
- Overmoulded: anti-dusting, anti-moisture, waterproof, anti-shock.
- 20 pcs Max.(constant voltage) in a series connection.
- CE, ROHS and UL certified.

## Application



- Best for 8-15 cm depth illuminate letter or light box at airports, metros, banks, buildings and shopping malls,etc.

## Parameters




Items	Parameters
Part Number	PREMIUM LED MODULE FOR EXTERIOR 3 LENS DC 12V/1.2W IP67
CCT (K)	WW / NW / PW / CW
Beaming Angle (°)	170
CRI (Ra)	≥75
Luminous Flux (lm)	120
Voltage (V)	DC12V
Power (W)	1.2
Driving Method	Constant Voltage
Dimension (mm)	80*17.5*6.2
Weight(g)	11.0
Working Tem. (°C)	-25 ~ +60
Storage Tem. (°C)	-25 ~ +70
Protection Grade	IP67


## Dimension



Unit:mm

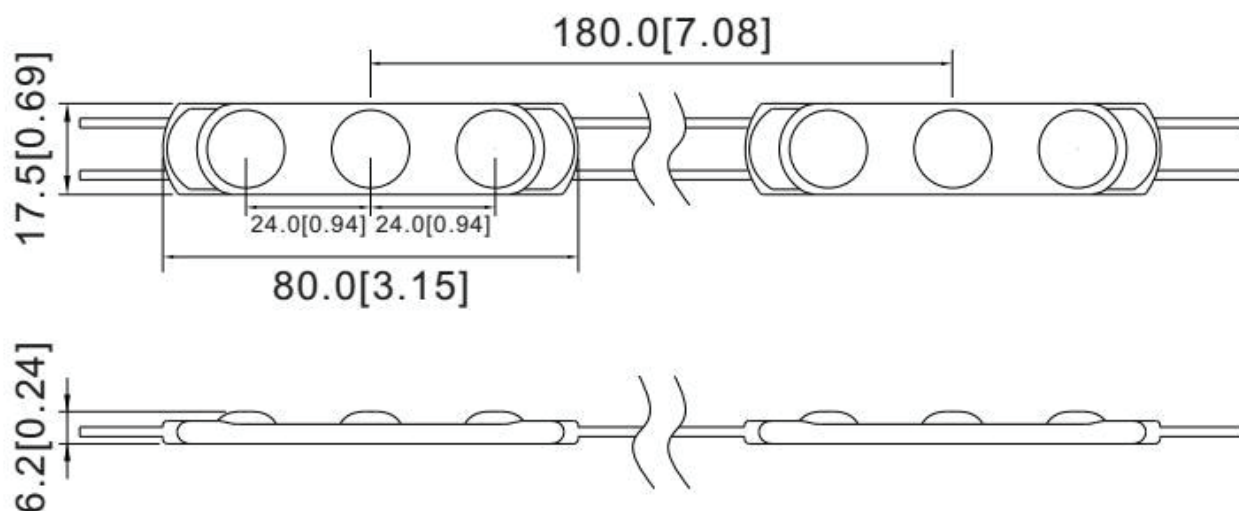

## Beaming Angle

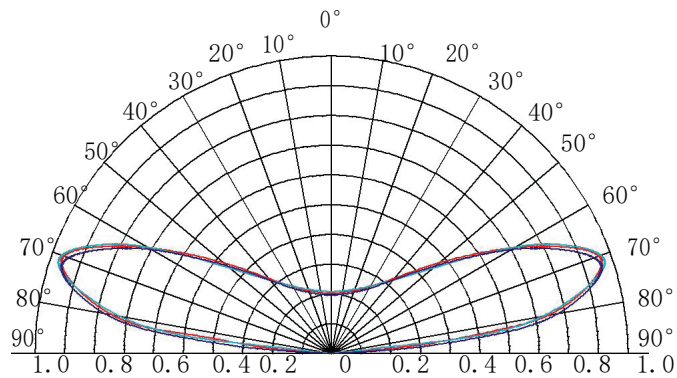


## Reference Scheme


Depth(mm)	Distance(mm)	Density(pcs/m <sup>2</sup> )	Illumination(lux)
Dz=60	Dx=130 Dy=90	85	4300-4700
Dz=80	Dx=150 Dy=90	74	2800-3200
Dz=100	Dx=180 Dy=90	62	1800-2300
Dz=120	Dx=180 Dy=90	62	1300-1700
Dz=150	Dx=180 Dy=90	62	1000-1300

### Remark:


- The transmittance of the Acrylic was 56%.
- The above data is for reference only.

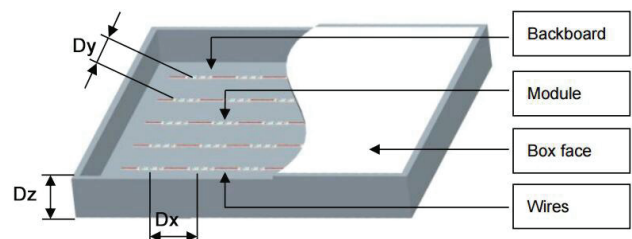

## Wire Connection

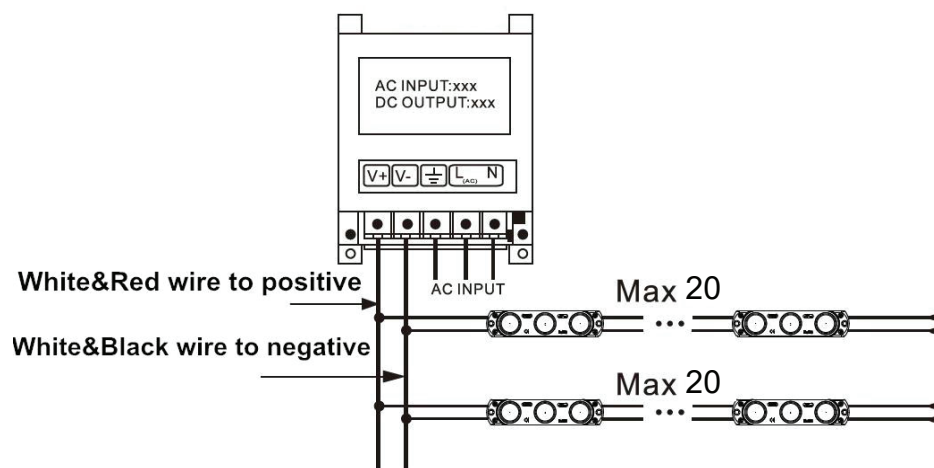

## Packing

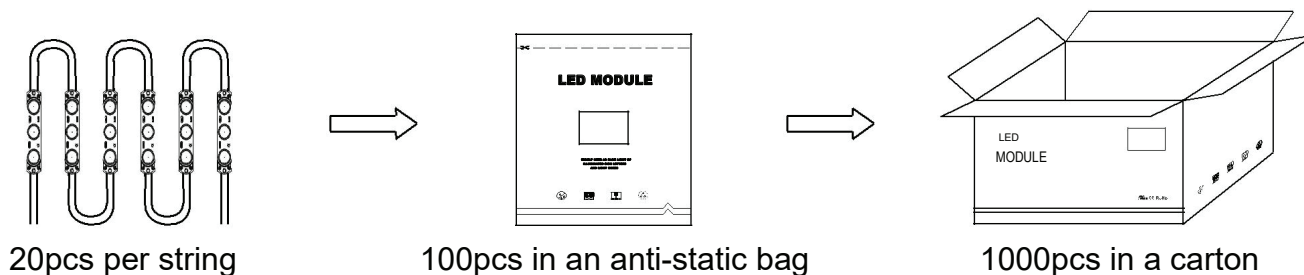

## Packing Specification

- Antistatic bag adopted
- Packing information

Part Number	PREMIUM LED MODULE FOR EXTERIOR 3 LENS DC 12V/1.2W IP67
Carton dimension(mm)	490*450*220
Bags per carton	10
Quantity per carton(pcs)	1000
Net Weight(kg)	11.1(1±10%)
Gross Weight(kg)	12.1(1±10%)

- Due to the packing manner difference, please subject to the original products in case of discrepancy found between the picture and actual product.

## Warning

- Disassembling or modifying the product is forbidden.
- Installation with power on is forbidden.
- Any organic solvent chemical is forbidden.
- Acidic or alkaline adhesive is forbidden when install, neutral glass cement could be used for installation purpose, make it drying in open environment for four hours.
- Isolation and corrosion prevention on all wiring points and wire ends.
- Make sure the power wire is thick enough and ensure the voltage and connections are connected correctly before power on.
- This product should be used in a sign, do not expose it in opening site.
- Installation, maintaining should be done by professional staff.
- 20 pcs in a serial connection maximum.
- The power wire between power supply and module should be less than two meters to keep the same brightness on all parts.



## Declaration



- Warranty: 5 years.
- In order to ensure the safety, the broken wires need to be replaced by the manufacturer or the service agent, or by the staff with the similar qualification.
- The given data in the specification was based on the laboratory testing, there may be discrepancy found in the actual products.
- The given drawings in the specification are only for reference, there may be discrepancy found in the actual products.
- The products are subject to change without prior notification.



BUCUREȘTI:

[bucuresti@verla.ro](mailto:bucuresti@verla.ro)

Tel: +4 0729 016 484

CLUJ-NAPOCA

[cluj@verla.ro](mailto:cluj@verla.ro)

Tel: +4 0721 242 216

IAȘI

[iasi@verla.ro](mailto:iasi@verla.ro)

Tel: +4 0746 124 531