

Descriere

Hartie de transfer semiopacă, cu adeziv special creat ce permite un transfer fără probleme folosind tehnica de lipire uscată. Nu are suport, astfel că se comercializează numai la rolă.

Caracteristici


Grosime: 110 microni

Tip adeziv: special, pe bază de cauciuc natural, cu putere medie de lipire

Dimensiuni rola

Lățimi: 500 mm, 1000 mm, 1220 mm

Lungime: 50 m.

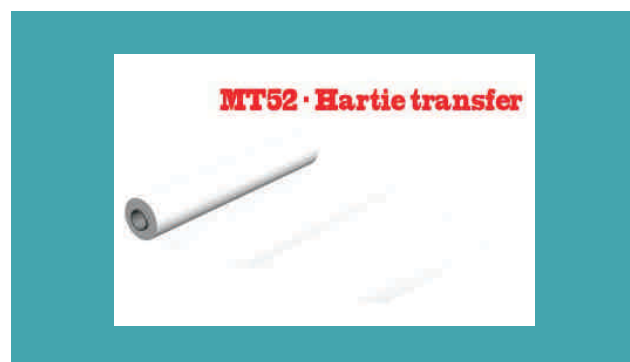

Aplicații

Se folosește pentru transferarea pe suprafață de inscripționat a decupajelor realizate cu cutter-plottere.

CARACTERISTICI MATERIAL		Valori/UM	
GROSIME		95μ	
GREUTATE		80g/m ²	
ADERENȚĂ ADEZIV (după 20 min., suport oțel inoxidabil)		3.8N/25mm	FINAT TM 1
REZISTENȚĂ DE RUPERE LA TRACȚIUNE	în lungime	5.1N/15 mm	DIN EN ISO 527
	transversal	3,2N/15 mm	
ALUNGIRE LA RUPERE	în lungime	2,7 %	DIN EN ISO 527
	transversal	2,7 %	
TEMPERATURA MINIMA DE APLICARE		> +10°C	
DURATA DE DEPOZITARE*		6 luni	

* ÎN CUTIA ORIGINALĂ, LA 20°C ȘI UMDIDATEA AERULUI DE 50%

ORATAPE

MT 52 Application Tape

07/16

Description

Semi-transparent mounting paper for the transfer of die-cut or computer-cut letters and symbols.

Adhesive

Natural rubber, medium adhesive strength.

Area of use

The special composition of the adhesive enables problem-free transfer of die-cut or computer-cut letters and symbols using dry bonding techniques. This mounting paper is suitable for almost all well-known types of glossy or matt-finished films.

Technical data

Thickness* (film with adhesive)	95 micron
Weight* (with adhesive)	80 g/m ²
Adhesive power* (FINAT TM 1, after 20min, stainless steel)	3,8 N/25 mm
Tensile strength dry	
along	5,1 N/15 mm
across	3,2 N/15 mm
Tensile strength wet, along	1,4 N/15 mm
Elongation at break	2,7%
Shelf life (20°C and 50% relative humidity)	6 months
Application temperature	min. +10 °C

The statements in this information sheet are based upon our knowledge and practical experience. This data is intended only as a source of information and is given without guarantee and does not constitute a warranty. Due to the wide variety of possible uses and applications customers should independently determine the suitability of this material for their specific purpose, prior to use.



ORAFOL Europe GmbH - Am Biotop 2 - D 16515 Oranienburg
Telefon: +49 (0) 33 01/864 0 - Telefax: +49 (0) 33 01/864 100
E-Mail: verkauf@orafol.de - Internet: <http://www.orafol.d>